

Low Headroom Electric Wire Rope Hoist

Hoist model CVAT4522TpE315N

Capacity - 10 tonne in FEM9.511 - 2m

Lifting Height - 9m

Lifting Speed - 4.8/1.2 m/min

Voltage Supplies - 230, 440 and 575V-3ph-60Hz

Trolley Speed - 14.4/4.8 m/min

Rope Reeving - 4/1

Net Weight (without counter weight) - 1,010kg


Electric panel mounted to counter weight

Mechanical overload protection (OL)

Optional thermal overload protection (Tp)

*Standard flange width up to 300mm

300~508mm optional

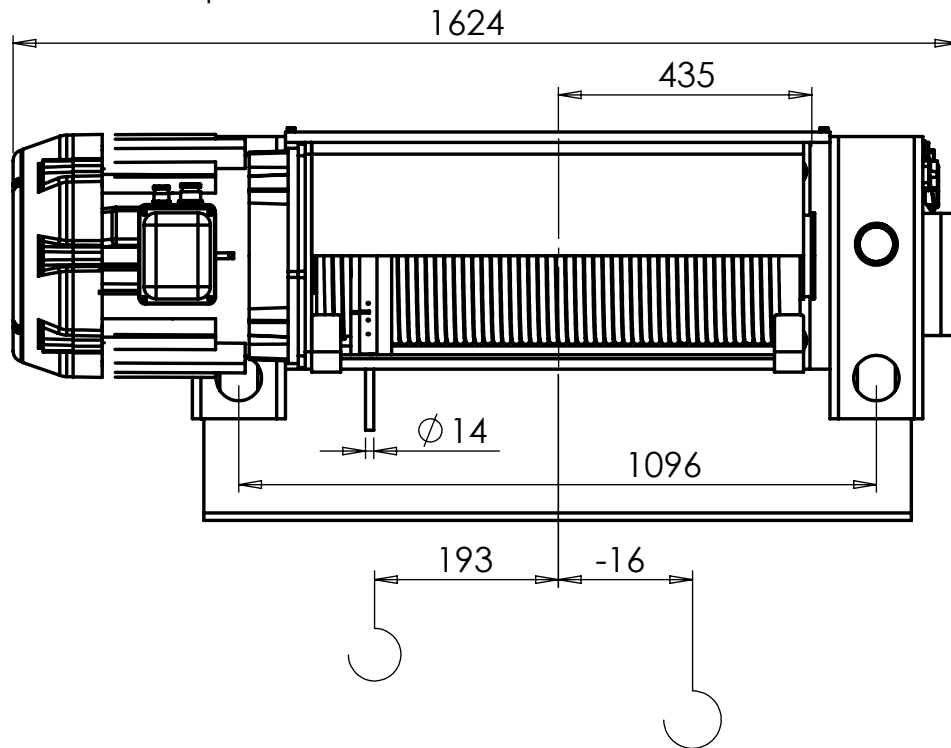

Lifting Motor model KV4003-24/6


Rated power - 2.0/ 9.6 kW

Switches per hour - 300h-1

Trolley Motor model 2x TP1160.70. AK80-12/4

Rated power - 0.14/0.44 kW

Switches per hour - 240h-1

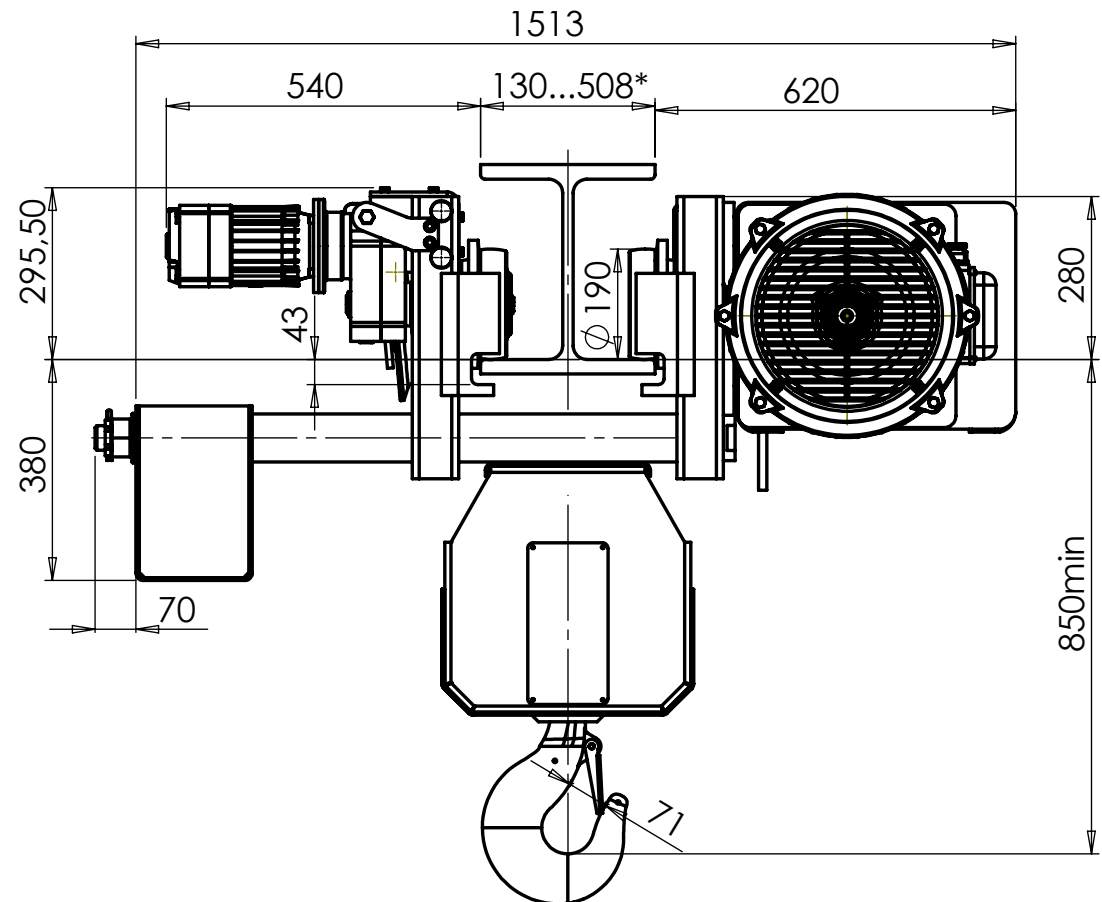

t 604 796 9221 e integrity@hydramachcrane.com
f 604 796 9227 www.hydramachcrane.com

*Dimensions and specifications subject to change without notice.