

Low Headroom Electric Wire Rope Hoist

Hoist model CVATB1422TpE315N

Capacity - 3.2 tonne in FEM9.511 - 1Am

Lifting Height - 9m

Lifting Speed - 4.8/0.72 m/min

Voltage - 230/440/575V-3ph-60Hz

Trolley Speed - 14.4/4.8 m/min

Rope Reeving - 4/1

Net Weight (without counter weight) - 410kg


Electric panel mounted to counter weight

Mechanical overload protection (OL)

Optional thermal overload protection (Tp)

*Standard flange width up to 300mm

300~508mm optional

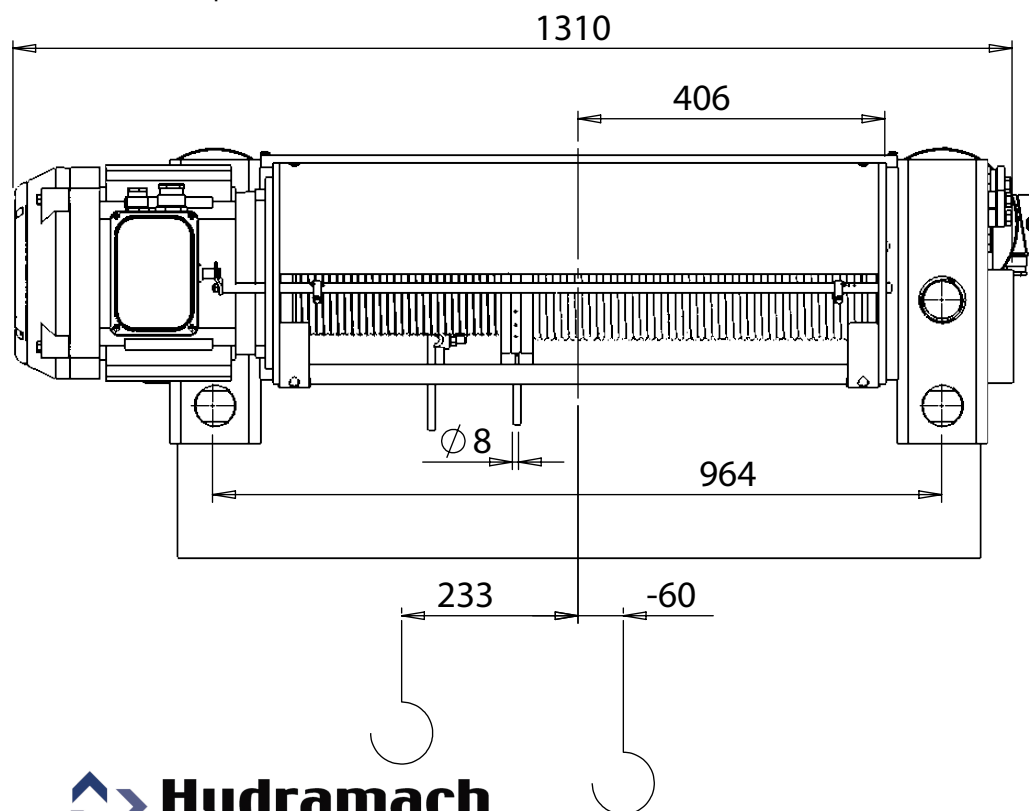

Lifting Motor model KV1003 24/4


Rated power - 0.4/2.7 kW

Switches per hour - 300h-1

Trolley Motor model 2x TP1160.47. AK80B-12/4

Rated power - 0.1/0.3 kW

Switches per hour - 240h-1

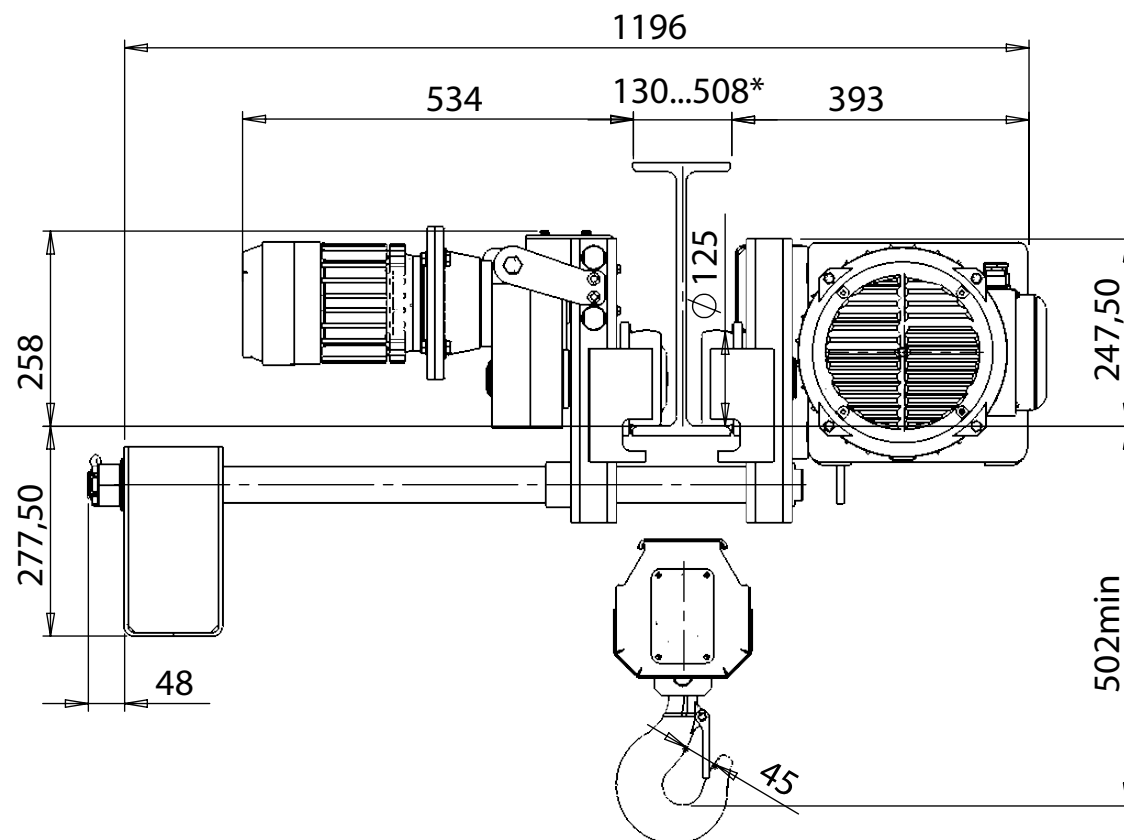

t 604 796 9221
f 604 796 9227

e integrity@hydramachcrane.com
www.hydramachcrane.com

*Dimensions and specifications subject to change without notice.