

Hoist model KVATB35..2TpE315N

Capacity - 7 tonne in FEM9.511 - 2m [H4]
Lifting Speed - 4.8/0.72 m/min
Voltage - 230,460 & 575V-3ph-60Hz
Trolley Speeds - 14.4/4.8 m/min
Rope Reeving - 4/1
Optional thermal overload protection (Tp)
Mechanical overload protection (OL)
Electric panel not shown



Lifting Motor model KV3003 24/4

Rated power - 1.2/9.0 kW
Switches per hour - 300h-1

Trolley Motor model 2x TP1200.57 AK80-12/4

Rated power - 0.14/0.44 kW
Switches per hour - 240h-1

*Dimensions and specifications subject to change without notice.

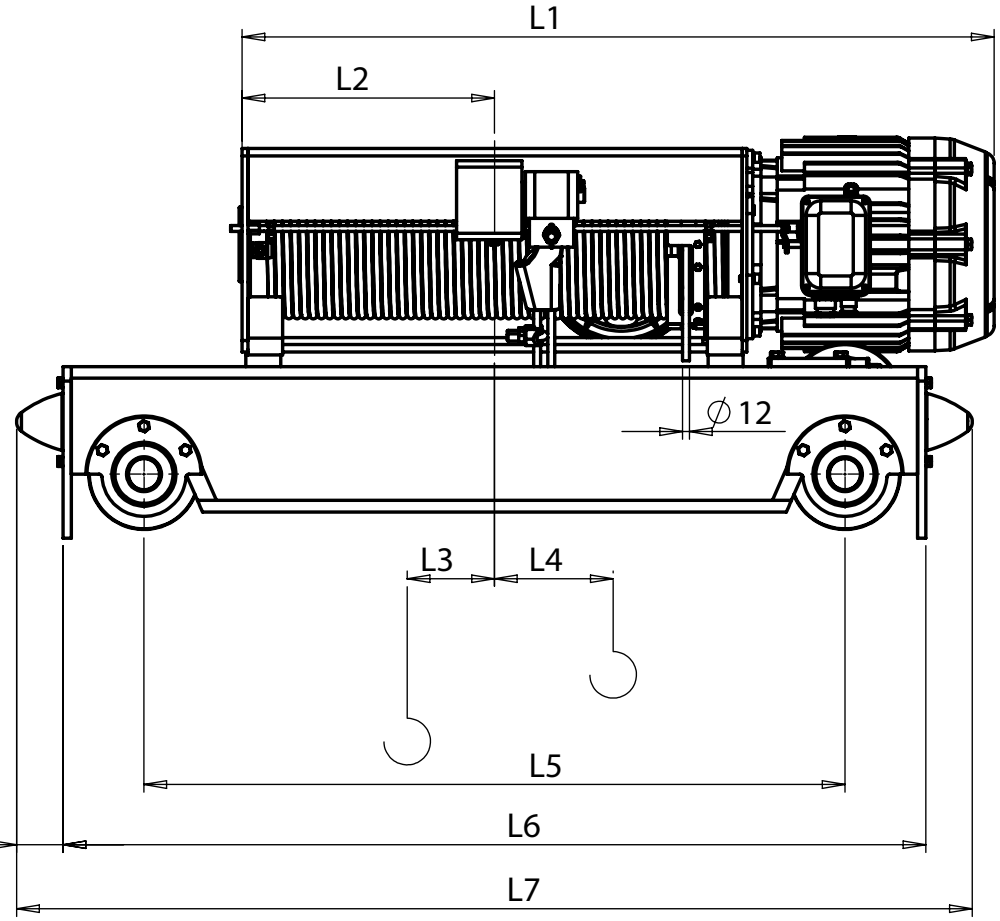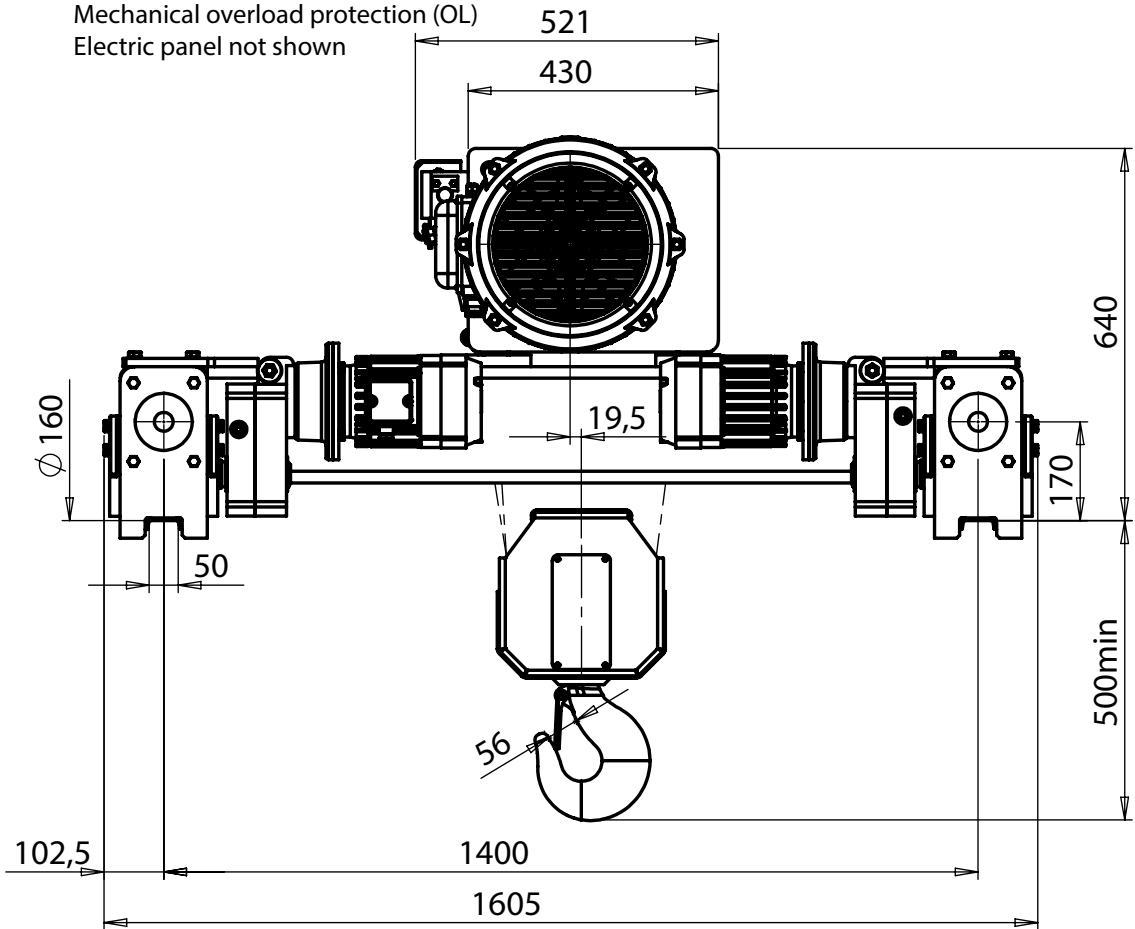

MODEL	H [m]	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L5 [mm]	L6 [mm]	L7 [mm]	G [kg]
KVATB3512TpE315N	6,5	1074	324	10	104	985	1263	1423	815
KVATB3522TpE315N	9,5	1294	434	-45	214	1205	1483	1643	870
KVATB3532TpE315N	12,5	1514	544	-100	324	1425	1703	1863	925

