


Low Headroom Electric Wire Rope Hoist

Hoist model CVATB3522TpE315N

Capacity - 7 tonne in FEM9.511 - 2m
Lifting Height - 9.5m
Lifting Speed - 4.8/0.72 m/min
Voltage - 220/440/575V-3ph-60Hz
Trolley Speed - 14.4/4.8 m/min
Rope Reeving - 4/1
Net Weight (without counter weight) - 615kg
Electric panel mounted to counter weight
Mechanical overload protection (OL)
Optional thermal overload protection (Tp)
*Standard flange width up to 300mm
300~508mm optional

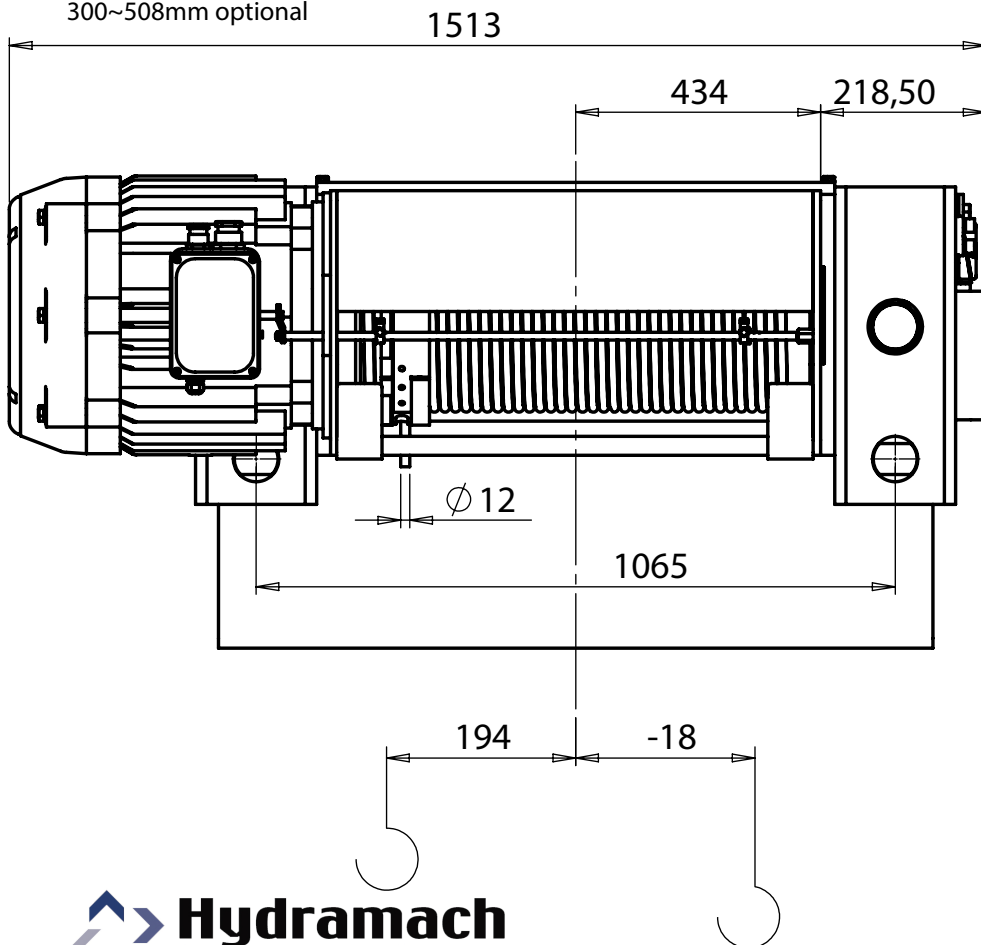


Lifting Motor model KV3003 24/4

Rated power - 1.2/9.0 kW
Switches per hour - 300h-1

Trolley Motor model 2x TP1160.56. AK80B-12/4

Rated power - 0.1/0.3 kW
Switches per hour - 240h-1

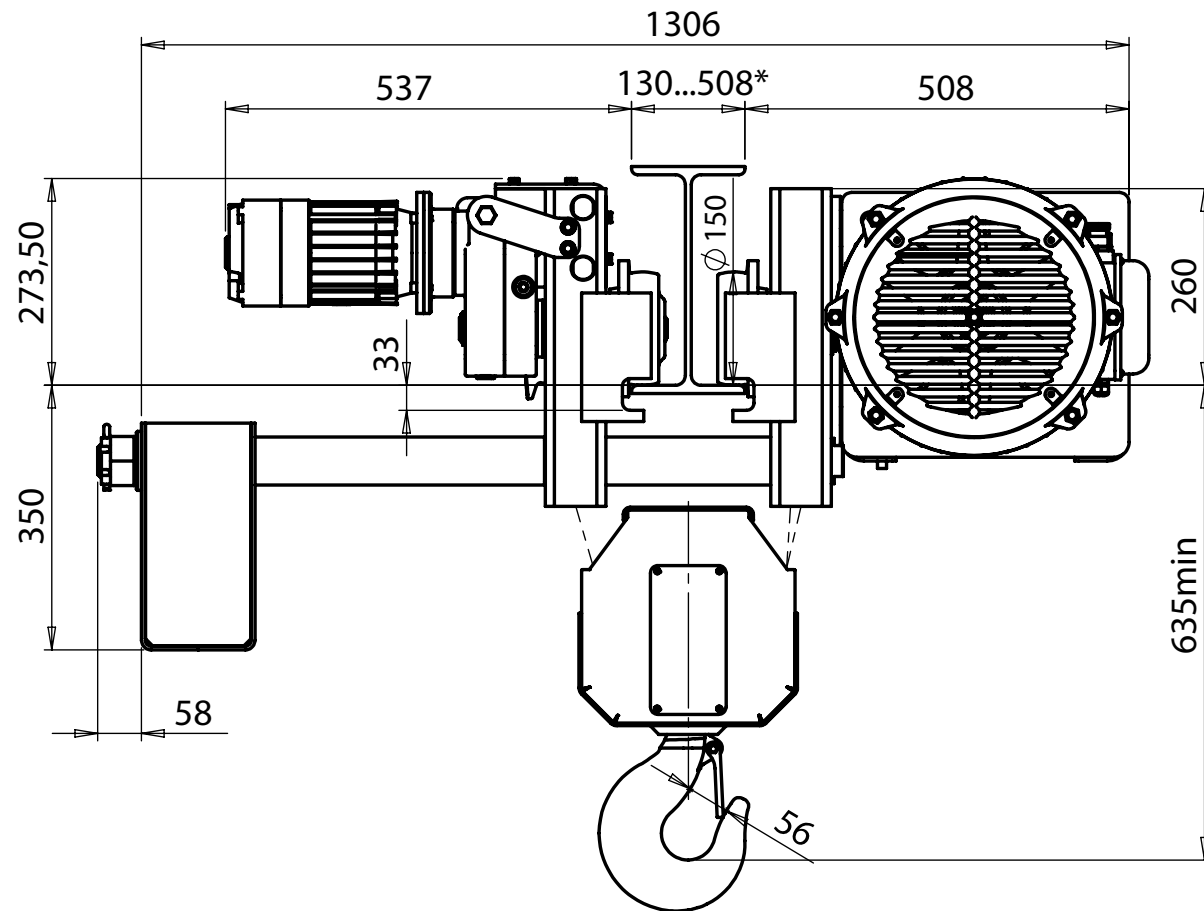

t 604 796 9221 e integrity@hydramachcrane.com
f 604 796 9227 www.hydramachcrane.com

*Dimensions and specifications subject to change without notice.