

Top Running Electric Wire Rope Hoist

Hoist model KVAT45..2TpE315N

Capacity - 10 tonne in FEM9.511 - 2m [H4]

Lifting Speed - 4.8/1.2 m/min

Voltage - 230,460 & 575V-3ph-60Hz


Trolley Speeds - 14.4/4.8 m/min

Rope Reeving - 4/1

Optional thermal overload protection (Tp)

Mechanical overload protection (OL)

Electric panel not shown

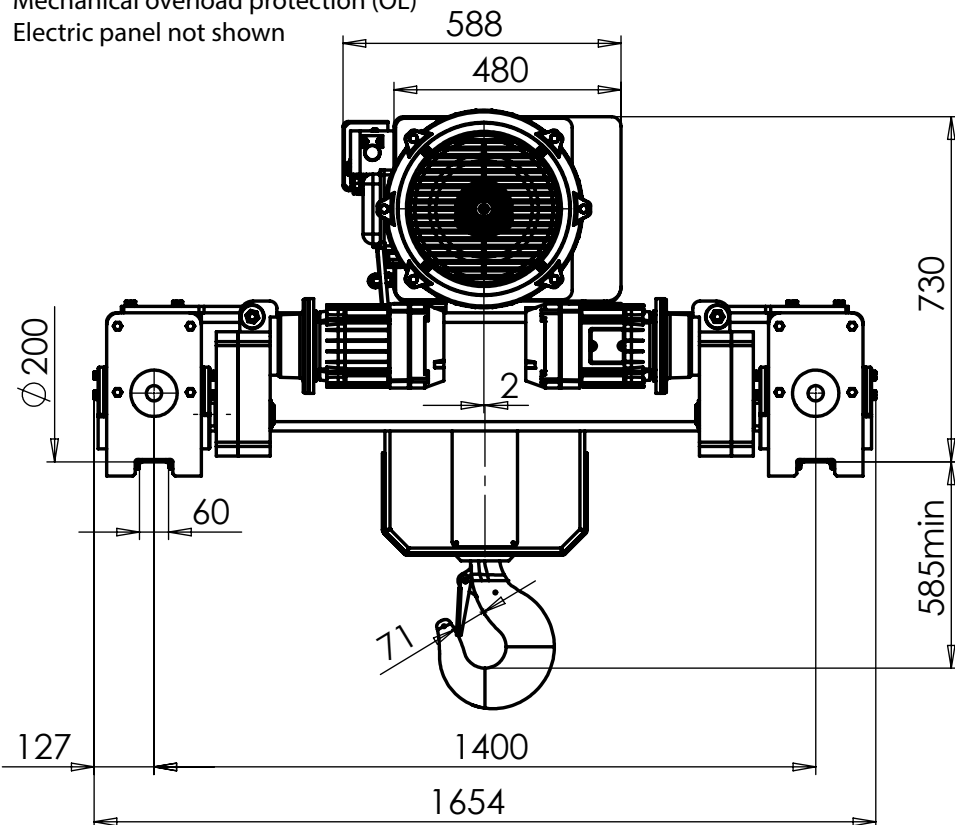

Lifting Motor model KV4003-24/6

Rated power - 2.0/ 9.6 kW


Switches per hour - 300h-1

Trolley Motor model 2x TP1250.72. AK80P-12/4

Rated power - 0.22/0.66 kW

Switches per hour - 240h-1

*Dimensions and specifications subject to change without notice.

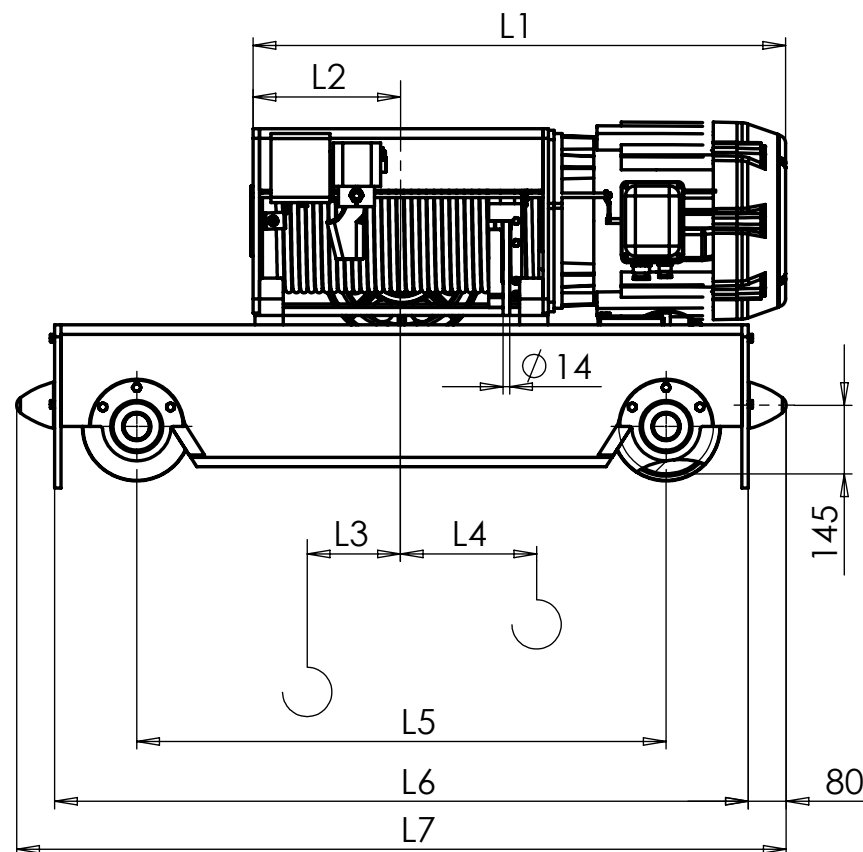

Hydramach
Overhead Crane

t 604 796 9221

f 604 796 9227

e integrity@hydramachcrane.com

www.hydramachcrane.com

MODEL	H [m]	L1 [mm]	L2 [mm]	L3 [mm]	L4 [mm]	L5 [mm]	L6 [mm]	L7 [mm]	G [kg]
KVAT4512TpE315N	6	1127	312	50	57	1120	1468	1628	1230
KVAT4522TpE315N	9	1373	435	-12	189	1366	1714	1874	1335
KVAT4532TpE315N	12,5	1619	558	-74	311	1612	1960	2120	1440